

# Ficha técnica del producto

Especificaciones



## INTERRUPTOR TERMOMAGNETICO QO 3P. 70 A. ENCHUFABLE 10kA 240V

QO370

### Principal

Product	Interruptor automático en miniatura
Range	QOD
Current Rating	70 A
Voltage Rating	120 V CA 240 V CA 120 V CA
Mounting Type	Conexión
Number of Poles	3P
Circuit Breaker Type	Standard ((*))
Ratings	HACR rated ((*))
Electrical Connection	Box lugs ((*))

### Opcionales

Interrupt Rating	10 kA 120 V CA 50/60 Hz 10 kA 240 V CA 50/60 Hz 10 kA 120 V CA 50/60 Hz
Number of Panel Spaces	3
Wire Size	AWG 8...AWG 2 cobre o aluminio
Tightening Torque	5 N.m 10...25 mm <sup>2</sup> AWG 8...AWG 2
Height	79 mm
Width	57 mm
Depth	74 mm
Peso del producto	0.476 kg

### Ambiente

Certifications	Registrado por UL CSA
Ambient Rating	40 °C

### Unidades embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	5.842 cm
Package 1 Width	8.636 cm
Package 1 Length	9.652 cm
Package 1 Weight	476.0 g
Unit Type of Package 2	PAL
Number of Units in Package 2	1728
Package 2 Height	101.6 cm
Package 2 Width	91.44 cm
Package 2 Length	121.92 cm
Package 2 Weight	830.835 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	36
Package 3 Height	9.652 cm
Package 3 Width	35.306 cm
Package 3 Length	53.34 cm
Package 3 Weight	17.849 kg

## Oferta sostenibilidad

Estado de oferta sostenible	Producto Green Premium
Reglamento REACh	<a href="#">Declaración de REACh</a>
Directiva RoHS UE	Conforme <a href="#">Declaración RoHS UE</a>
Sin mercurio	Sí
Información sobre exenciones de RoHS	<a href="#">Sí</a>
Normativa de RoHS China	<a href="#">Declaración RoHS China</a> Producto fuera del ámbito de RoHS China. Declaración informativa de sustancias
Presencia de halógenos	Producto libre de halógenos

## Garantía contractual


Periodo de garantía	18 months
---------------------	-----------

# Ficha técnica del producto

# QO370

Ilustración técnica

## Dimensiones

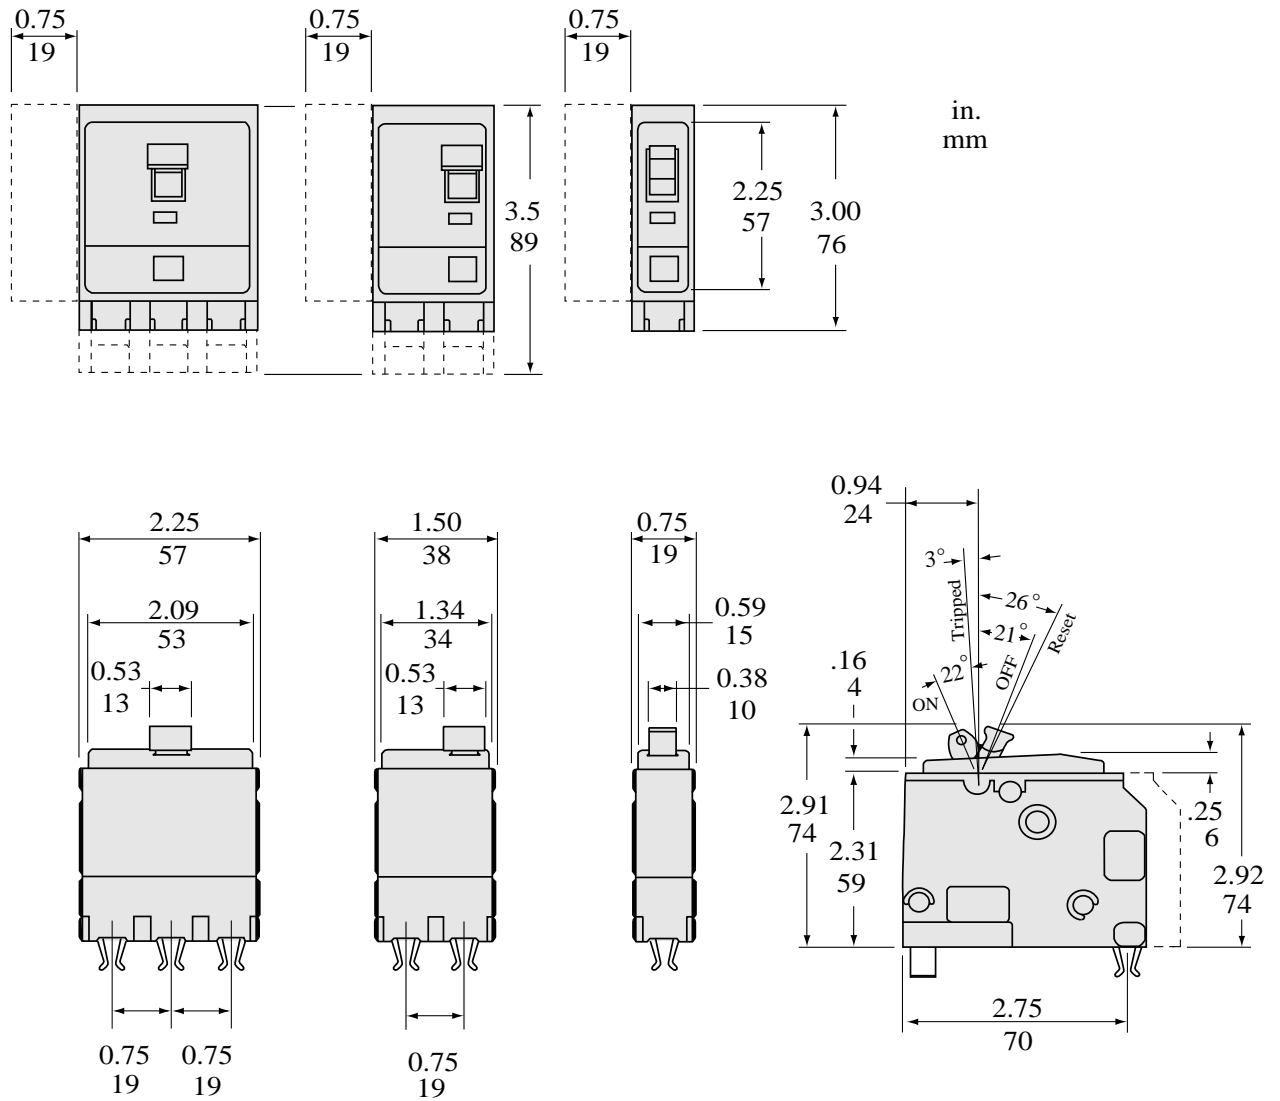

Dimensions are approximate. Refer to technical documentation, dimension drawings, and/or CAD for additional detail.

## Reemplazo(s) recomendado(s)