


DATOS DIMENSIONALES

TABLEROS DE ALUMBRADO Y DISTRIBUCIÓN

Código	Núm. de polos	Altura h mm	Ancho a mm	COMBINACIONES DE PRE RUPTURAS			
				A		B	
				Diámetro		Diámetro	
				Menor mm plg	Mayor mm plg	Menor mm plg	Mayor mm plg
BTN12S	12	779	508	51.00	92.00	38.10	50.80
				2.00	3.62	1.50	2.00
BTN24S	24	892	508	51.00	92.00	38.10	50.80
				2.00	3.62	1.50	2.00
BTN30S	30	976	508	51.00	92.00	38.10	50.80
				2.00	3.62	1.50	2.00
BTN42S	42	1145	508	51.00	92.00	38.10	50.80
				2.00	3.62	1.50	2.00
BTA12E		819	548				
BTA12S		783	512				
BTA24E		932	548				
BTA24S		896	512				
BTA30E		1016	548				
BTA30S		980	506				
BTA42E		1185	548				
BTA42S		1149	516				
Tubería conduit admisible				1 1/2"	3"	1"	1 1/2"

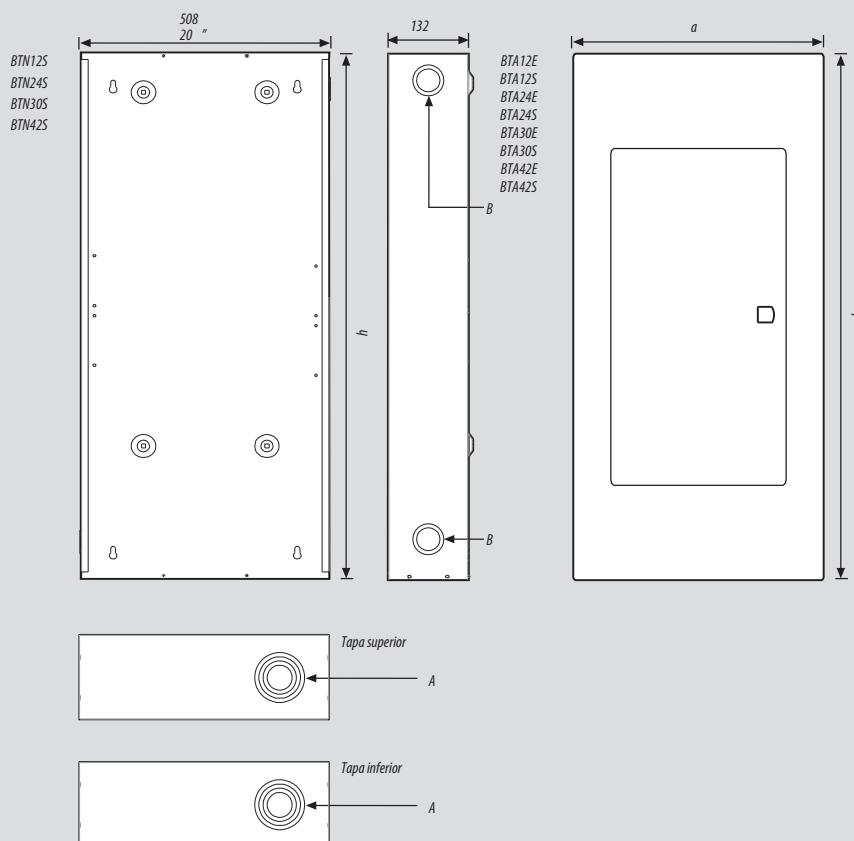

Dimensiones en milímetros