

# Ficha técnica del producto

Especificaciones



## INTERRUPTOR TERMOMAGNETICO QO 1P. 15 A. ENCHUFABLE 10kA 240V

QO115

### Principal

Product	Interruptor automático en miniatura
Range	QOD
Current Rating	15 A
Voltage Rating	120 V CA 120 V CA 48 V DC
Mounting Type	Conexión
Number of Poles	1P
Circuit Breaker Type	Standard (**)
Ratings	HACR and Switching Duty rated
Electrical Connection	Pressure plate (**)

### Opcionales

Interrupt Rating	10 kA 120 V CA 50/60 Hz 10 kA 120 V CA 50/60 Hz 5 kA 48 V DC
Number of Panel Spaces	1
Wire Size	AWG 14...AWG 8 cobre o aluminio
Tightening Torque	5 N.m 10...25 mm <sup>2</sup> AWG 8...AWG 2
Height	76 mm
Width	19 mm
Depth	74 mm
Peso del producto	0.136 kg

### Ambiente

Certifications	Registrado por UL CSA
Ambient Rating	40 °C

### Unidades embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	7.62 cm
Package 1 Width	1.778 cm
Package 1 Length	8.382 cm
Package 1 Weight	136.078 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	8.382 cm
Package 2 Width	1.778 cm
Package 2 Length	19.558 cm
Package 2 Weight	1.243 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	100
Package 3 Height	20.828 cm
Package 3 Width	17.018 cm
Package 3 Length	44.196 cm
Package 3 Weight	12.973 kg

## Oferta sostenibilidad

Estado de oferta sostenible	Producto Green Premium
Reglamento REACH	<a href="#">Declaración de REACH</a>
Directiva RoHS UE	Conforme <a href="#">Declaración RoHS UE</a>
Sin metales pesados tóxicos	Sí
Sin mercurio	Sí
Información sobre exenciones de RoHS	<a href="#">Sí</a>
Normativa de RoHS China	<a href="#">Declaración RoHS China</a> Producto fuera del ámbito de RoHS China. Declaración informativa de sustancias
Presencia de halógenos	Producto libre de halógenos

## Garantía contractual


Periodo de garantía	18 months
---------------------	-----------

# Ficha técnica del producto

# QO115

Ilustración técnica

## Dimensiones

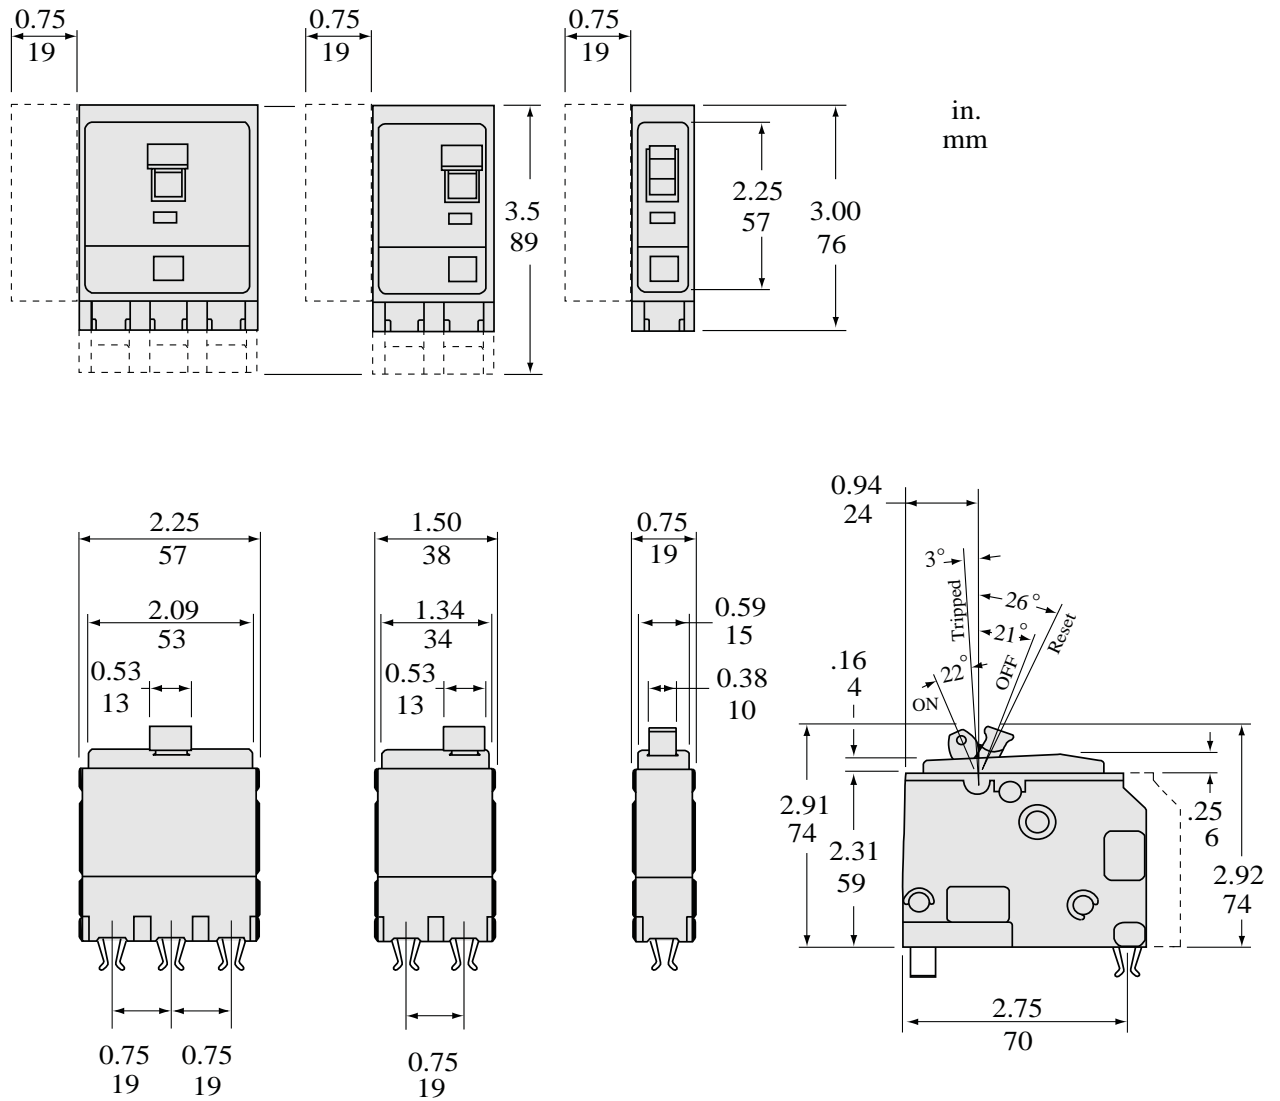

Dimensions are approximate. Refer to technical documentation, dimension drawings, and/or CAD for additional detail.

## Reemplazo(s) recomendado(s)