

Ficha técnica del producto

Especificaciones



INT. 30 AMP. 2 POLOS

QO230

Principal

Product	Interruptor automático en miniatura
Range	QOD
Current Rating	30 A
Voltage Rating	120 V CA 120 V CA 48 V DC
Mounting Type	Conexión
Number of Poles	2P
Circuit Breaker Type	Standard ((*))
Ratings	HACR rated ((*))
Electrical Connection	Pressure plate ((*))

Opcionales

Interrupt Rating	10 kA 120 V CA 50/60 Hz 10 kA 120 V CA 50/60 Hz 5 kA 48 V DC
Number of Panel Spaces	2
Wire Size	AWG 14...AWG 8 cobre o aluminio
Tightening Torque	5 N.m 10...25 mm ² AWG 8...AWG 2
Height	76 mm
Width	38 mm
Depth	74 mm
Peso del producto	0.249 kg

Ambiente

Certifications	Registrado por UL CSA
Ambient Rating	40 °C

Unidades embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	6.35 cm
Package 1 Width	3.556 cm
Package 1 Length	7.62 cm
Package 1 Weight	249.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	8.89 cm
Package 2 Width	3.556 cm
Package 2 Length	20.32 cm
Package 2 Weight	1.247 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	50
Package 3 Height	21.59 cm
Package 3 Width	18.288 cm
Package 3 Length	44.45 cm
Package 3 Weight	12.769 kg

Oferta sostenibilidad

Estado de oferta sostenible	Producto Green Premium
Reglamento REACH	Declaración de REACH
Directiva RoHS UE	Conforme Declaración RoHS UE
Sin metales pesados tóxicos	Sí
Sin mercurio	Sí
Información sobre exenciones de RoHS	Sí
Normativa de RoHS China	Declaración RoHS China Producto fuera del ámbito de RoHS China. Declaración informativa de sustancias
Presencia de halógenos	Producto libre de halógenos

Garantía contractual


Periodo de garantía	18 months
---------------------	-----------

Ficha técnica del producto

QO230

Ilustración técnica

Dimensiones

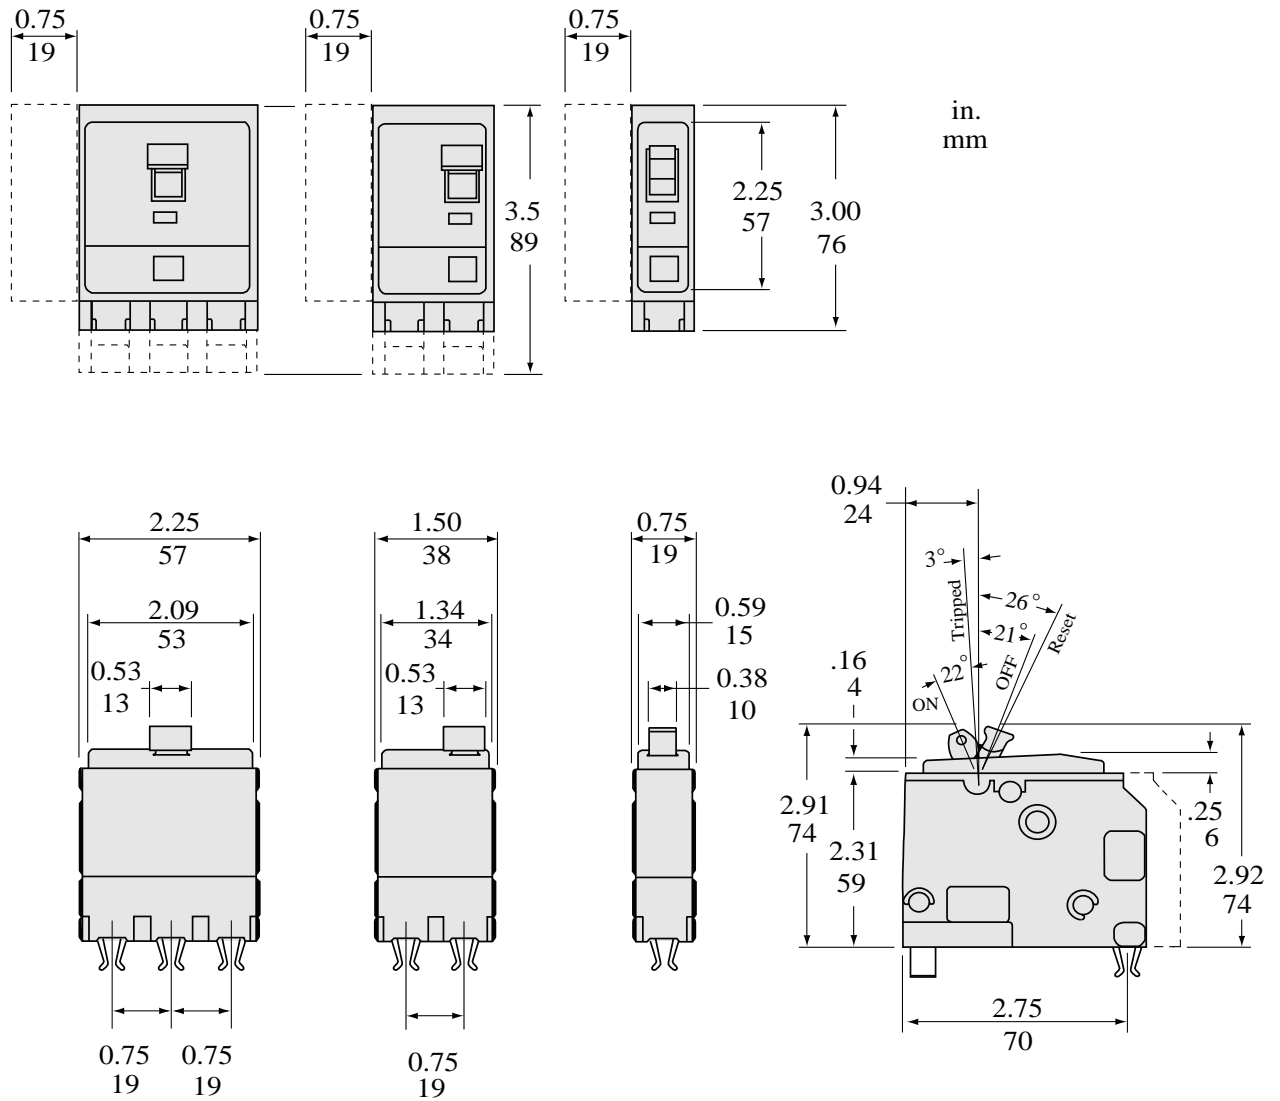

Dimensions are approximate. Refer to technical documentation, dimension drawings, and/or CAD for additional detail.

Reemplazo(s) recomendado(s)