

# Ficha técnica del producto

Especificaciones



## INTERRUPTOR TERMOMAGNETICO QO 2P. 40 A. ENCHUFABLE 10kA 120/240V

QO240

### Principal

Product	Interruptor automático en miniatura
Range	QOD
Current Rating	40 A
Voltage Rating	120 V CA 120 V CA 48 V DC
Mounting Type	Conexión
Number of Poles	2P
Circuit Breaker Type	Standard ((*))
Ratings	HACR rated ((*))
Electrical Connection	Box lugs ((*))

### Opcionales

Interrupt Rating	10 kA 120 V CA 50/60 Hz 10 kA 120 V CA 50/60 Hz 5 kA 48 V DC
Number of Panel Spaces	2
Wire Size	AWG 8...AWG 2 cobre o aluminio
Tightening Torque	5 N.m 10...25 mm <sup>2</sup> AWG 8...AWG 2
Height	79 mm
Width	38 mm
Depth	74 mm
Peso del producto	0.227 kg

### Ambiente

Certifications	Registrado por UL CSA
Ambient Rating	40 °C

### Unidades embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	8.38 cm
Package 1 Width	4.06 cm
Package 1 Length	8.13 cm
Package 1 Weight	258.55 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	8.382 cm
Package 2 Width	6.858 cm
Package 2 Length	19.558 cm
Package 2 Weight	1.334 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	50
Package 3 Height	20.828 cm
Package 3 Width	20.32 cm
Package 3 Length	43.688 cm
Package 3 Weight	13.63 kg

## Oferta sostenibilidad

Estado de oferta sostenible	Producto Green Premium
Reglamento REACh	<a href="#">Declaración de REACh</a>
Directiva RoHS UE	Conforme <a href="#">Declaración RoHS UE</a>
Sin mercurio	Sí
Información sobre exenciones de RoHS	<a href="#">Sí</a>
Normativa de RoHS China	<a href="#">Declaración RoHS China</a> Producto fuera del ámbito de RoHS China. Declaración informativa de sustancias
Presencia de halógenos	Producto libre de halógenos

## Garantía contractual


Periodo de garantía	18 months
---------------------	-----------

# Ficha técnica del producto

# QO240

Ilustración técnica

## Dimensiones

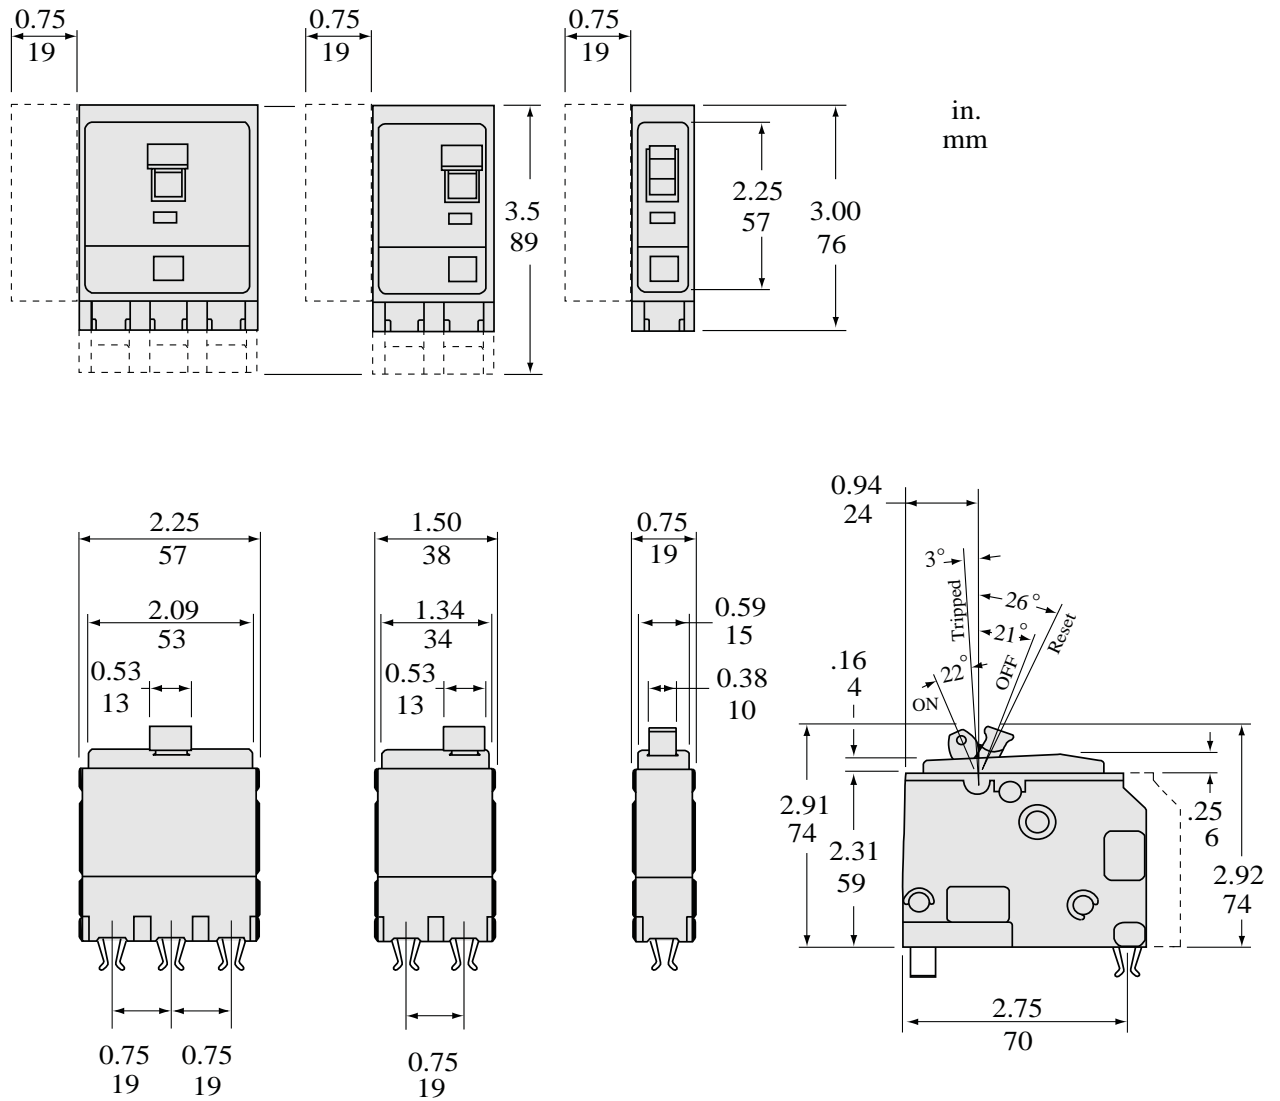

Dimensions are approximate. Refer to technical documentation, dimension drawings, and/or CAD for additional detail.

## Reemplazo(s) recomendado(s)