

Ficha técnica del producto

Especificaciones



INTERRUPTOR TERMOMAGNETICO QO 2P. 70 A. ENCHUFABLE 10kA 120/240V

QO270

Principal

Product	Interruptor automático en miniatura
Range	QOD
Current Rating	70 A
Voltage Rating	120 V CA 120 V CA 48 V DC
Mounting Type	Conexión
Number of Poles	2P
Circuit Breaker Type	Standard ((*))
Ratings	HACR rated ((*))
Electrical Connection	Box lugs ((*))

Opcionales

Interrupt Rating	10 kA 120 V CA 50/60 Hz 10 kA 120 V CA 50/60 Hz 5 kA 48 V DC
Number of Panel Spaces	2
Wire Size	AWG 8...AWG 2 cobre o aluminio
Tightening Torque	5 N.m 10...25 mm ² AWG 8...AWG 2
Height	79 mm
Width	38 mm
Depth	74 mm
Peso del producto	0.272 kg

Ambiente

Certifications	Registrado por UL CSA
Ambient Rating	40 °C

Unidades embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	3.81 cm
Package 1 Width	8.128 cm
Package 1 Length	8.128 cm
Package 1 Weight	272.0 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	8.382 cm
Package 2 Width	6.858 cm
Package 2 Length	19.558 cm
Package 2 Weight	1.334 kg
Unit Type of Package 3	CAR
Number of Units in Package 3	20
Package 3 Height	20.574 cm
Package 3 Width	17.526 cm
Package 3 Length	18.796 cm
Package 3 Weight	5.534 kg

Oferta sostenibilidad

Estado de oferta sostenible	Producto Green Premium
Reglamento REACh	Declaración de REACh
Directiva RoHS UE	Conforme Declaración RoHS UE
Sin mercurio	Sí
Información sobre exenciones de RoHS	Sí
Normativa de RoHS China	Declaración RoHS China Producto fuera del ámbito de RoHS China. Declaración informativa de sustancias
Presencia de halógenos	Producto libre de halógenos

Garantía contractual


Periodo de garantía	18 months
---------------------	-----------

Ficha técnica del producto

QO270

Ilustración técnica

Dimensiones

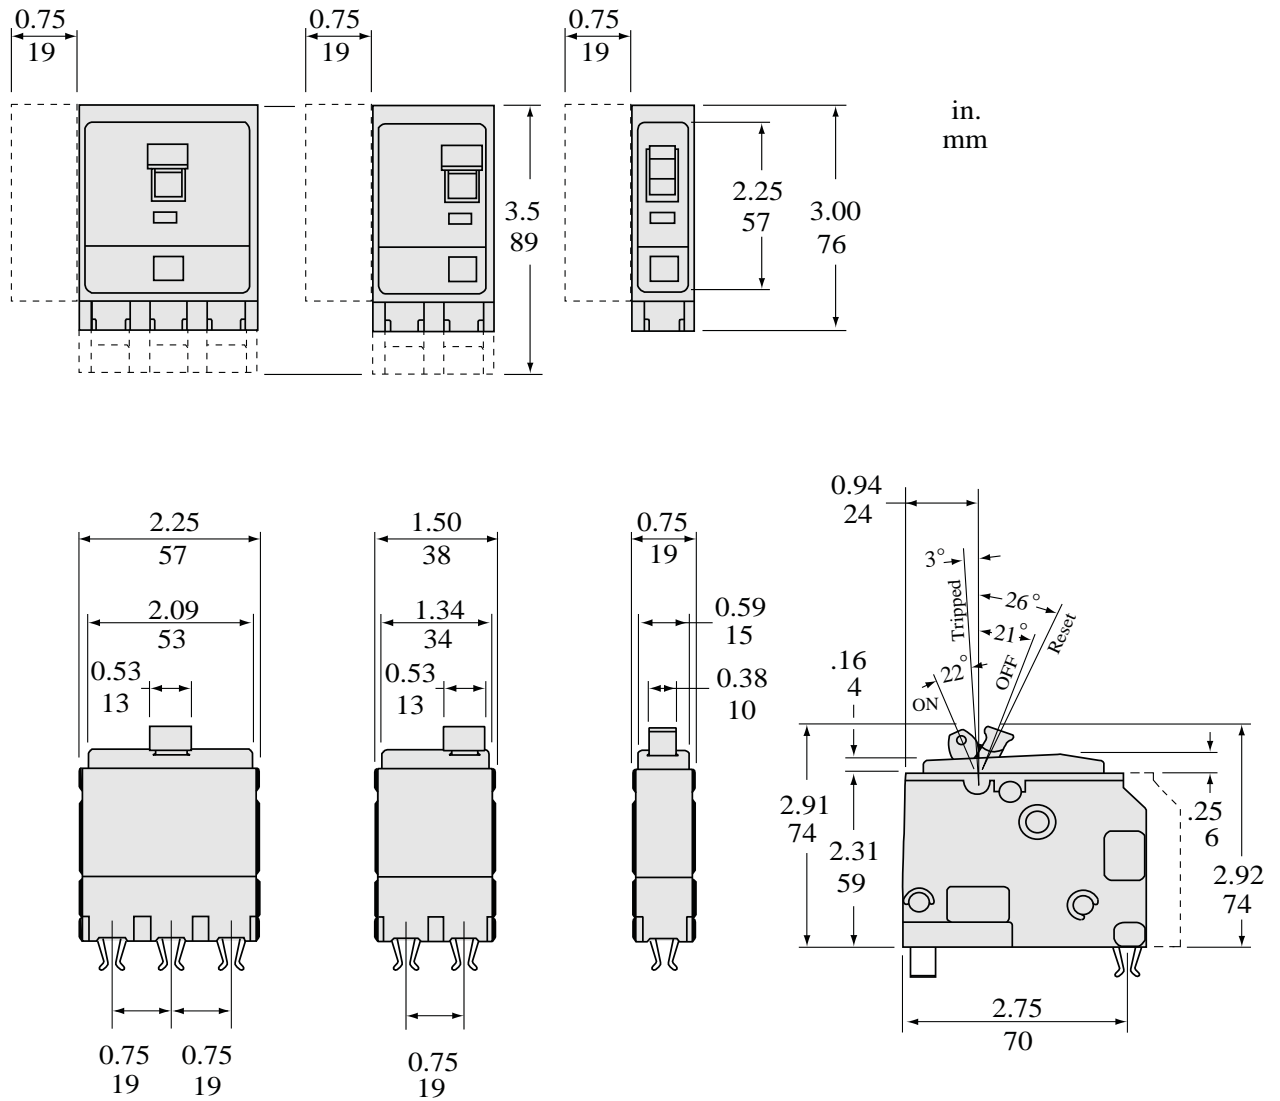

Dimensions are approximate. Refer to technical documentation, dimension drawings, and/or CAD for additional detail.

Reemplazo(s) recomendado(s)