

Ficha técnica del producto

Especificaciones



Interruptor Enchufable QO 25A 2P 120/240 VAC 10 kA

QO225

Principal

Product	Interruptor automático en miniatura
Range	QOD
Current Rating	25 A
Voltage Rating	120 V CA 120 V CA "48 V" DC
Mounting Type	Conexión
Number of Poles	2P
Circuit Breaker Type	Standard ((*))
Ratings	HACR rated ((*))
Electrical Connection	Pressure plate ((*))

Complementario

Interrupt Rating	10 kA en 120 V CA 50/60 Hz 10 kA en 120 V CA 50/60 Hz 5 kA en "48 V" DC
Number of Panel Spaces	2
Wire Size	AWG 14...AWG 8 cobre o aluminio
Tightening Torque	5 N.m para 10...25 mm ² - tipo de cable: AWG 8...AWG 2)
Height	76 mm
Width	38 mm
Depth	74 mm
Peso neto	0.249 kg

Entorno

Certifications	Registrado por UL CSA
Ambient Rating	40 °C

Unidades de embalaje

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Height	3.81 cm
Package 1 Width	7.874 cm
Package 1 Length	8.128 cm
Package 1 Weight	249.476 g
Unit Type of Package 2	PAL
Number of Units in Package 2	1800
Package 2 Height	101.6 cm
Package 2 Width	91.44 cm
Package 2 Length	121.92 cm
Package 2 Weight	460.323 kg
Unit Type of Package 3	BB1
Number of Units in Package 3	5
Package 3 Height	7.874 cm
Package 3 Width	7.874 cm
Package 3 Length	19.558 cm
Package 3 Weight	1.252 kg

Sostenibilidad de la oferta

Estado de oferta sostenible	Producto Green Premium
Reglamento REACH	Declaración de REACH
Directiva RoHS UE	Conforme Declaración RoHS UE
Sin metales pesados tóxicos	Sí
Sin mercurio	Sí
Información sobre exenciones de RoHS	Sí
Normativa de RoHS China	Declaración RoHS China Producto fuera del ámbito de RoHS China. Declaración informativa de sustancias
Presencia de halógenos	Producto libre de halógenos

Garantía contractual


Periodo de garantía	18 months
---------------------	-----------

Ficha técnica del producto

QO225

Ilustración técnica

Dimensiones

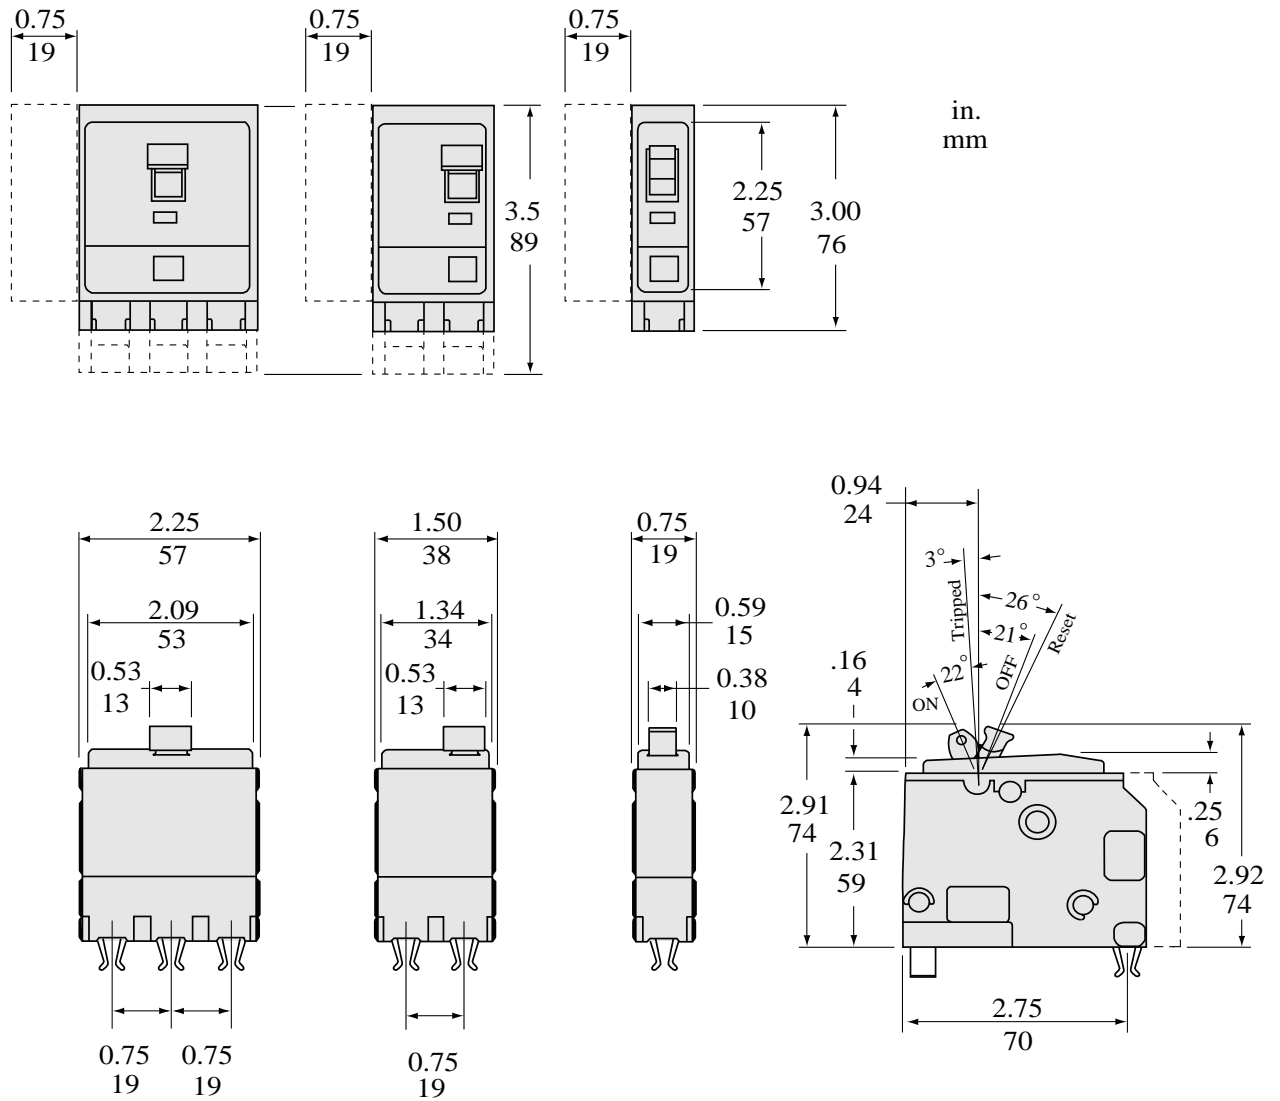

Dimensions are approximate. Refer to technical documentation, dimension drawings, and/or CAD for additional detail.

Reemplazo(s) recomendado(s)